

# WSF-00231 CDMA Repeater Tx Filter

## Features:

- Low Insertion Loss
- Excellent Selectivity
- Symmetrical Rejection on Both Sides of the Passband
- Temperature Stabilized
- High Power
- Low Cost




## Specifications

Passbands:	870 to 880 MHz	I/O Impedance:	50 Ohms
Passband Insertion Loss:	1.2 dB maximum	Operating Temperature:	-40 to +60°C
Rejection:		Operating Humidity:	0 to 90%, relative, non-condensing,
$f_0$ +/- 7.5 MHz	27 dB minimum	Dimensions:	200L x 138"W x 45"mm
$f_0$ +/- 40 MHz	70 dB minimum	(excluding connectors)	
Power Handling:	50 Watts	Connectors:	SMA-F

## Applications

- Filter can be utilized for China CDMA repeater requirements.
- Other frequencies available

## Performance Data

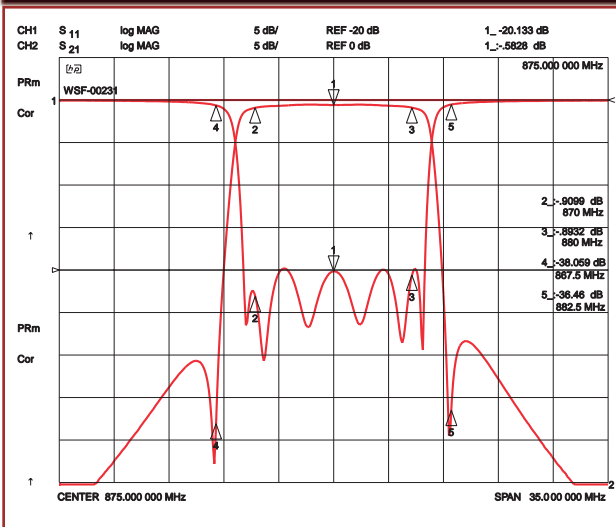

## Electrical Performance

### Filtering Solutions for Your Global Market

**USA**  
Phone: 410-749-2424  
FAX: 410-749-2788  
Email: wireless@klmicrowave.com

**EUROPE**  
Phone: 44-(0)-1262 605500  
FAX: 44-(0)-1262 605504  
Email: sales@kleurope.com

Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)

